PREMASK & PRESPACING TAPES

HEAVY WEIGHT
PREMIUM PAPER



Premask & Prespacing Tapes are heavy weight, premium paper with an Release Liner Adhesion (RLA®) that lay flat with no tunneling or edge curling.

Premask & Prespacing Tapes

Works in either wet or dry applications

No adhesive balls, gapping between layers, or crushed edges

Tears cleanly – no stringy, legging adhesive

Multiple roll widths available

No adhesive build-up on stored graphics

Premasks

- Low to medium tack
- Covers a one piece printed vinyl graphic
- Protects during storage, transport and handling

4760 Medium/HighTack
- Tape for UV and solvent-based screen print inks and clear coats

Prespacing Tapes

- Used to mark die cut graphics
- Holds cut vinyl lettering and emlems together during installation

4885 High Tack
- For difficult to transfer graphics, thermal die-cut and textured window graphics

4761RLA High Tack
- Use with air egress vinyls, die cut and plotter cut graphics
- Conform® Release Liner Adhesion prevents tunneling and edge curl

4775RLA High Tack
- Small and medium die cut graphics
- Compatible with most vinyl films and graphics with overlaminates
- Conform® Release Liner Adhesion prevents tunneling and edge curl

Applications

One Piece Printed Graphics

Wall Graphics


Decals

Banners

PREMASK & PRESPACING TAPES

HEAVY WEIGHT
PREMIUM PAPER



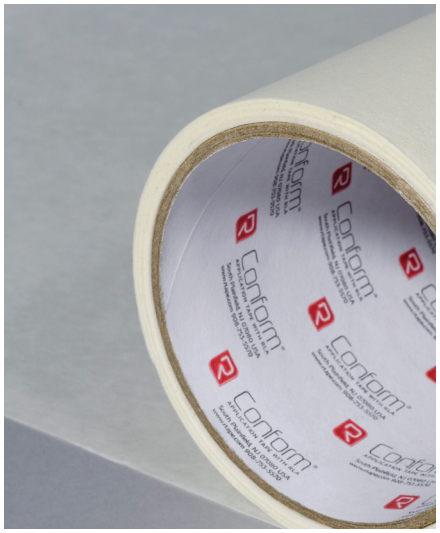

STOCKED PRODUCTS

	4760	4885	4761RLA	4775RLA
Premask & Prespacing Tapes				
Caliper	4.3 mil	4.3 mil	4.3 mil	4.3 mil
Tack Level	Medium-High	Extra High	High	High
Adhesion to Steel*	13 - 15 oz N/100 mm	20+ oz N/100 mm	14 - 17 oz N/100 mm	15-18 oz N/100 mm
Roll Size				
24"	•		•	•
36"	•		•	•
48"	•	•	•	•
54"	•			

*** TEST METHOD:** PSTC-101

TECHNICAL DATA

Physical Properties & Conditions for Use	
Adhesive	Rubber-Based
Color	Off-White/Translucent
Tensile	297 N/100 mm (17 lb/in)
Elongation	3-4%
Tear Resistance	50
Shelf Life	1 Year

FSC
www.fsc.org
FSC® C084886
The mark of responsible forestry

WARRANTY Tapes are only warranted to be free of defects in workmanship or materials at time of shipment. RTape will replace or credit any material deemed to be defective. No acceptance or responsibility for loss, damage, or expense, implied or otherwise, shall be assumed by the seller or manufacturer. The end user assumes all risk and liability.